



Smart concept; Smart design

Bright, Elegant & Compact



Light Output **2600 lm**

Front Exhaust

Digital Connectivity
(only for EB-X10/W10)

Auto Keystone
(only for EB-X10/W10)

The Epson EB-S10/X10/W10 projectors offer a stylish new design, and impressive performance. A powerful 2600 lumens enables use in bright environments, and their wide variety of input options ensures compatibility with a broad range of multimedia input devices including computers, DVD players and gaming consoles

- AV Mute Slide Lens Shutter
- Professional Carry Case
- Quick Start-up 5 sec / Instant Off
- 5000 hour *E-TORL long-life lamp
- 60 inch projection at 1.8m
- Low standby power consumption


*E-TORL Epson-Twin Optimize Reflection Lamp



Multimedia Projector EB-S10/EB-X10/EB-W10

Digital Connectivity

Projecting the highest quality digital images is made possible thanks to the inclusion of an HDMI terminal on both the Epson EB-X10 and W10. And connection to a PC or Mac via USB cable is simple with Epson's USB display feature. You can even view a J-PEG slide show directly from a USB memory device without the need for a PC.

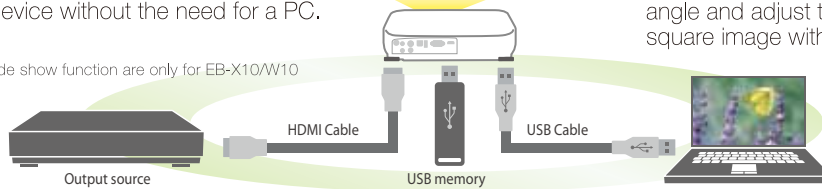

*HDMI and Slide show function are only for EB-X10/W10

Front Exhaust

Positioning the projector exhaust in the front of the projector means no irritating hot air flow affecting the audience during desktop usage.



Auto Keystone Correction (only for X10/W10)

The EB-X10 and W10 automatically detect the projector's vertical angle and adjust the vertical keystone distortion ensuring a sharp square image without the need for complicated adjustments.

SUPPLIED ACCESSORIES

| |
|---|
| Power Cable 1.8m |
| Remote Control |
| With AA type alkaline batteries x 2pcs |
| Computer Cable |
| 1.8m <6 ft>, AHD-15 pin type slim-cable |
| Soft Carrying Case |
| Password Protect Sticker |
| Owner's Manual |

OPTIONAL ACCESSORIES


| | |
|---------|----------------|
| ELPLP58 | Spare Lamp |
| ELPAF25 | Air Filter Set |

SPECIFICATIONS

| Specification of Main Parts | | EB-S10 | EB-X10 | EB-W10 |
|-------------------------------------|-----------------------------------|--|---|---------------------------------|
| LCD | Size | 0.55 inch (x 3) | 0.55 inch (x 3) | 0.59 inch (x 3) |
| | Pixel Number | 480,000 dots (800 x 600) x 3 | 786,432 dots (1024 x 768) x 3 | 1,024,000 dots (1280 x 800) x 3 |
| | Native Resolution | SVGA | XGA | WXGA |
| Projection Lens | | Manual focus & 1.35x digital zoom | Manual focus & 1.2x optical zoom | |
| | | F=1.44 / F=16.6mm | F=1.58 - 1.72 / F=16.9 - 20.28mm | |
| Lamp | Type | 200W UHE | | |
| | Life | 4000 hours (Power consumption: Normal) / 5000 hours (Power consumption: Eco) | | |
| Screen Size | | 30 to 350 inch [0.87 to 10.5m] | 30 to 300 inch [0.9 to 9.0m] | 33 to 318 inch [0.9 to 9.0m] |
| Offset | | 8:1 | | 6:1 |
| Light Output* | | Brightness Control Normal / Eco 2600 lm / 2040 lm | | |
| Color Light Output* | | 2600 lm / 2040 lm | | |
| Contrast* | | 2000:1 | | |
| Sound Output | | 1W monaural | | |
| Auto Keystone Correction | | N/A | Yes | |
| Analog RGB | Input Terminal | Video | D-sub 15-pin x 1 | |
| | Output Terminal | Audio | Stereo Mini x 1 | RCA x 1 (White / Red) |
| Video | Input Terminal | Video | Composite Video: RCA (Yellow) x 1 S-Video: Mini DIN x 1 Component Video: D-sub 15-pin x 1 (in common with Analog RGB connector) | |
| | | RGB Video: D-sub 15-pin x 1 (in common with Analog RGB connector) | | |
| | Audio | Stereo Mini x 1 (in common with Analog RGB Audio terminal) | RCA x 1 (White/Red) (in common with Analog RGB Audio terminal) | |
| | | HDMI x 1 | | |
| Digital Input Terminal | Video & Audio | N/A | HDMI x 1 | |
| Control Terminal | | USB Type B x 1 | | |
| Memory Terminal | | N/A | USB Type A x 1 | |
| Operating Temperature | | 5°C to 35°C <41°F to 95°F> | | |
| Operating Altitude | | Up to 7,500 feet <2,286m> (over 4,921 feet <1,500m> area: with High Altitude mode) | | |
| Start-Up Period | | About 5 sec. | | |
| Direct Power On | | Yes | | |
| Cool-Down Period | | Instant off | | |
| Power Supply Voltage | | 100 - 240V AC +/- 10%, 50/60Hz | | |
| Power Consumption | 100-120V | Lamp on | 280W | |
| | | Stand by | 0.3W (Communication Off) | |
| | 220-240V | Lamp on | 265W | |
| | | Stand by | 0.4W (Communication Off) | |
| Dimensions Exclude Feet (D x W x H) | | 228 x 295 x 77 | | |
| Weight | | Approx. 5.1 lbs. / 2.3kg | | |
| Fan Noise | Brightness Control : Normal / Eco | 37dB / 29dB | | |

*Light Output / Color Light Output / Contrast --- Color mode: Dynamic, Zoom: Wide

CONNECTOR PANEL (EB-S10)



CONNECTOR PANEL (EB-X10/W10)



CONNECTOR PANEL

| | |
|----|----------------|
| 1 | Audio Out |
| 2 | Audio Input |
| 3 | S-Video Input |
| 4 | Video Input |
| 5 | USB (Type B) |
| 6 | Computer Input |
| 7 | Video -L Input |
| 8 | Video -R Input |
| 9 | USB (Type A) |
| 10 | HDMI |

PROJECTION DISTANCE (EB-S10)

| 4:3 Screen size | Shortest (Wide) | Longest (Tele) | Offset (Wide) | Offset (Tele) |
|---|-----------------|----------------|---------------|---------------|
| X (screen size / dimension) | Y (cm / inch) | | Z (cm / inch) | Z (cm / inch) |
| 60" / 120 cm x 91 cm 47.2" x 35.4" | 177 / 70 | 240 / 95 | 10 / 3.9 | 3 / 1 |
| 80" / 160 cm x 120 cm 63.0" x 47.2" | 237 / 93 | 321 / 126 | 13 / 5.2 | 3 / 1.3 |
| 100" / 200 cm x 150 cm 78.7" x 59.1" | 297 / 117 | 402 / 158 | 17 / 6.5 | 4 / 1.7 |
| 200" / 410 cm x 300 cm 161.4" x 118.1" | 597 / 235 | 807 / 318 | 33 / 13.1 | 9 / 3.4 |

PROJECTION DISTANCE (EB-X10)

| 4:3 Screen size | Shortest (Wide) | Longest (Tele) | Offset |
|---|-----------------|----------------|---------------|
| X (screen size / dimension) | Y (cm / inch) | | Z (cm / inch) |
| 60" / 120cm x 91cm 47.2" x 35.4" | 180 / 71 | 217 / 85 | 10 / 4 |
| 80" / 160 cm x 120 cm 63.0" x 47.2" | 241 / 95 | 290 / 114 | 14 / 5.3 |
| 100" / 200 cm x 150 cm 78.8" x 59.1" | 302 / 119 | 363 / 143 | 17 / 6.7 |
| 200" / 410 cm x 300 cm 161.4" x 118.1" | 607 / 239 | 729 / 287 | 34 / 13.3 |

PROJECTION DISTANCE (EB-W10)

| 16:10 Screen size | Shortest (Wide) | Longest (Tele) | Offset |
|---|-----------------|----------------|---------------|
| X (screen size / dimension) | Y (cm / inch) | | Z (cm / inch) |
| 60" / 130 cm x 81 cm 51.0" x 32.0" | 168 / 66 | 202 / 79 | 12 / 4.5 |
| 80" / 170 cm x 110 cm 67.0" x 43.0" | 225 / 88 | 270 / 106 | 15 / 6.1 |
| 100" / 220 cm x 130 cm 87.0" x 51.0" | 281 / 111 | 338 / 133 | 19 / 7.6 |
| 200" / 430 cm x 270 cm 169.0" x 106.0" | 566 / 223 | 680 / 268 | 38 / 15.1 |